
FIG. 1

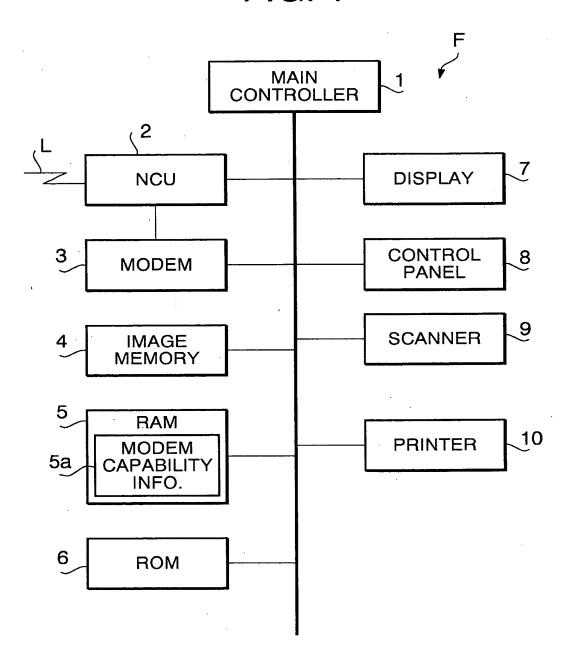

PROVED C.O. FIG.

109 → CHANGE TO V.27ter - 2.4kbps ✓ CHANGE TO V.27ter – 4.8kbps CHANGE TO V.27ter - 2.4kbps CHANGE TO V.17 - 12.0kbps CHANGE TO V.29 - 7.2kbps CHANGE TO V.17 – 9.6kbps CHANGE TO V17 - 7.2kbps 贸 贸 贸 <u>ញ</u> 贸 SS W 贸 118 110 112 120 20 108 114 116 .27ter - 4.8kbps? V.17 - 14.4kbps? V.17 - 12.0kbps? V.29 - 9.6kbps? V.17 – 9.6kbps? 7.17 - 7.2kbps? 1.29 - 7.2kbps? SEND EOR 일 **자** 2 2 2 2 2 SEND CTC 105 107 CHANGE TO V.27ter - 4.8kbps CHANGE TO V.29 - 9.6kbps CHANGE TO V.29 - 7.2kbps RETRANSMISSION OF ERROR FRAME \geq 9 SS SS 贸 SS SS 100 101 102 104 106 FRAME - ERROR FOR THE 4^{TR} RECEPTION FOR THE 4TH RECEPTION OF PPR V.17 - 14.4kbps? V.17 - 12.0kbps? V.17 - 9.6kbps? XES **₹**YES 2 욷 2 INE?

FIG. 2

FIG. 3

